

# Induction Deep Fryer





## DIHF070




### Specification

Electricity	DIHF070	380V, 60Hz, 3PH+N	Power Consumption	DIHF070	7000 W
	DIHF070-A	340~420V,		DIHF070-A	
	DIHF070-E	50/60Hz, 3PH+N		DIHF070-E	
Power Connection	Direct Connection to Circuit Breaker		Max Current	11.5 A	
Conversion to Calory	6048 Kcal/h				
Dimension / Weight	Product: 450 X 600 X 850 (mm) / 47kg (Back panel : 150mm) Package: 820 X 675 X 420 (mm) / 44.3kg				
Controller Type	Capactive button				
Oil Tank	350 X 360 X 240 (mm)		Oil Usage	17 L	
Control	Automatic Temperature Control		Temperature	40 ~ 180°C (Adjusting by 5°C or 10°C)	
Heating System	IH Side-wall Heating System				
Functions & Features	<b>■ Safety</b>				
	- Over current indication : "E1"				
	- Over voltage indication : "E2" ( Above 420V )				
	- Low voltage : "E3" ( Below 340V )				
	- Product over heated indication : "E4" ( Internal temperature above 85°C )				
- External thermal sensor absence or damage indication : "E5" (only when using temperature mode)					
- Unstable power indication : "E7"					
- Defective PCB indication : "E8"					
- Defective Working Coil indication : "E9"					
<b>■ Precise Temperature Control</b>					
- From 40°C to 230°C adjusted by 5°C / error factor ±2% below					
Warranty	1 year (to be charged in case of user's negligence)				

## Installation Guide



### Electric Wiring



- ▶ Electricity : 380V 3PH+N
- ▶ Circuit breaker : 15A or above
- ▶ Cables : 600V, 6SQMM or above, 4 phase
- ▶ Ground cable separated - 4SQMM or above

Seoul Office: #75, Ahasan-ro 78-gil, Gwangjin-gu, Seoul, Republic of Korea 04969 / Tel : +82 2-444-5895 / Fax : +82 70-4694-5412

R&D Center: #209, Goraesan-ro, Wabu-eup, Namyangju-si, Gyeonggi-do, Republic of Korea 12202 / Tel : +82 2-444-5895 / Fax : +82 70-4694-5412

DIPO INDUCTION CO., Ltd. / www.dipoele.com

COPYRIGHT©2010 DIPO INDUCTION CO., LTD ALL RIGHTS RESERVED.

# Induction Deep Fryer


## DIHF113




### Specification

Electricity	DIHF113	380V, 60Hz, 3PH+N	Power Consumption	DIHF113	11000 W
	DIHF113-A	340~420V, 50/60Hz, 3PH+N		DIHF113-A	
	DIHF113-E	340~420V, 60Hz, 3PH+N		DIHF113-E	
	DIHF110-CE1	340~420V, 60Hz, 3PH+N		DIHF110-CE1	
Power Connection		Direct Connection to Circuit Breaker	Max Current		16 A
Conversion to Calory		9504 Kcal/h			
Dimension / Weight		Product: 450 X 600 X 850 (mm) / 47kg (Back panel : 150mm) Package: 820 X 675 X 420 (mm) / 44.3kg			
Controller Type		Capactive button			
Oil Tank		350 X 360 X 240 (mm)	Oil Usage		17 L
Control		Automatic Temperature Control	Temperature		40 ~ 180°C (Adjusting by 5°C or 10°C)
Heating System		IH Side-wall Heating System			
Functions & Features		<b>■ Safety</b> - Over current indication : "E1" - Over voltage indication : "E2" ( Above 420V ) - Low voltage : "E3" ( Below 340V ) - Product over heated indication : "E4" ( Internal temperature above 85°C ) - External thermal sensor absence or damage indication : "E5" (only when using temperature mode) - Unstable power indication : "E7" - Defective PCB indication : "E8" - Defective Working Coil indication : "E9"			
		<b>■ Timer Setting</b> - Between 0sec - 720min (12hr)			
		<b>■ Precise Temperature Control</b> - From 40°C to 230°C adjusted by 5°C / error factor ±2% below			
		<b>Warranty</b> 1 year (to be charged in case of user's negligence)			

## Installation Guide

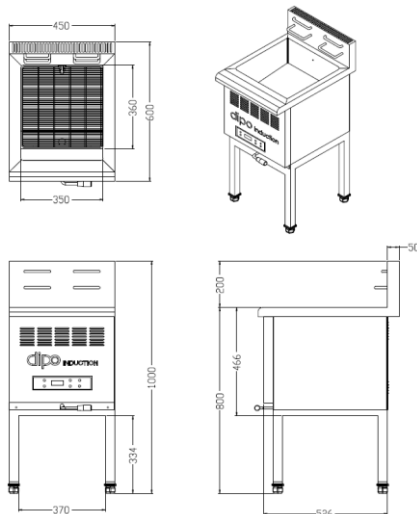

### Electric Wiring



- ▶ Electricity : 380V 3PH+N
- ▶ Circuit breaker : 20A or above
- ▶ Cables : 600V, 6SQMM or above, 4 phase
- ▶ Ground cable separated - 4SQMM or above

Seoul Office: #75, Ahasan-ro 78-gil, Gwangjin-gu, Seoul, Republic of Korea 04969 / Tel : +82 2-444-5895 / Fax : +82 70-4694-5412

R&D Center: #209, Goraesan-ro, Wabu-eup, Namyangju-si, Gyeonggi-do, Republic of Korea 12202 / Tel : +82 2-444-5895 / Fax : +82 70-4694-5412

DIPO INDUCTION CO., Ltd. / www.dipoel.com

COPYRIGHT©2010 DIPO INDUCTION CO., LTD ALL RIGHTS RESERVED.