

Under-counter Warmer

BKUW



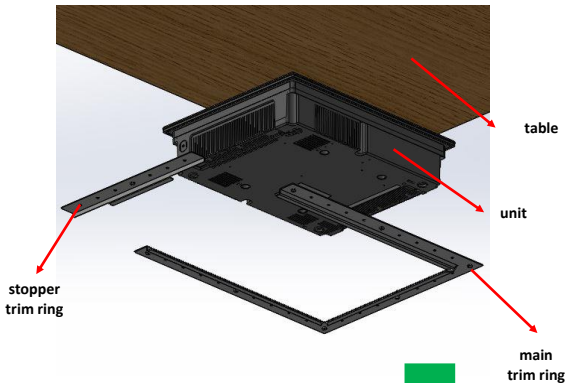
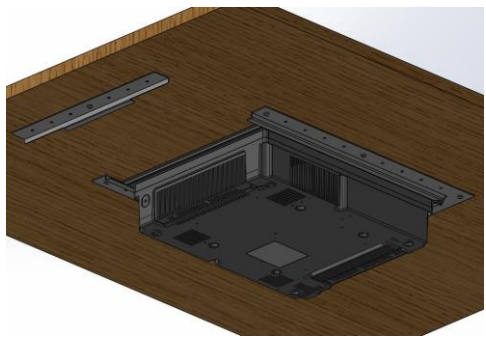
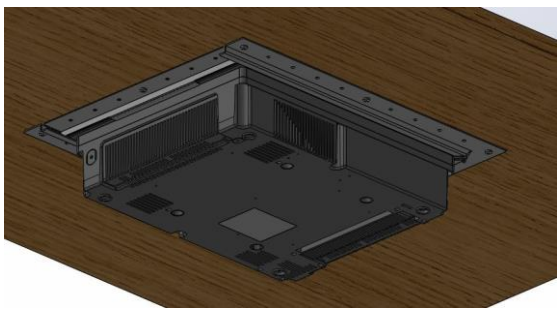
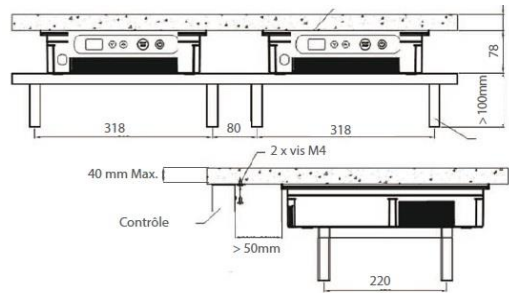
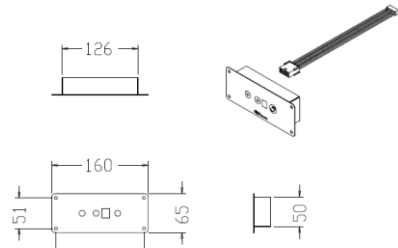
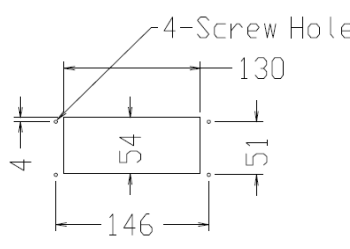
Specification

Electricity	BKUW	220V, 60Hz, 1PH	Power Consumption	BKUW	500 W				
	BKUW-A	208~240V, 50/60Hz, 1PH		BKUW-A					
	BKUW-E	220~240V, 50/60Hz, 1PH		BKUW-E					
	BKUW-CE1	220~240V, 60Hz, 1PH		BKUW-CE1					
	BKUW-J	200V, 50/60Hz, 1PH		BKUW-J					
Power Connection	Plug type	Max Current	2.5 A						
Conversion to Calory	345.6 Kcal/h								
7 Warming Steps (1-7)	1	2	3	4	5	6	7	(1L Water, using chafer)	
	35℃	40℃	50℃	60℃	70℃	80℃	90℃		
Dimension / Weight	Product: 296 X 370 X 80 (mm) / 4kg Package: 490 X 360 X 180 (mm) / 4.8kg								
Controller	Capacitive Button (separated from the unit)								
Power Cable	660 mm	Controller Cable	660 mm						
Cookware Diameter	min : Ø130mm max : Ø240mm	Loadable Weight	30 Kg						
Recommendation	Buffet, Warmer								
Features & Functions	<input checked="" type="checkbox"/> Safety - No vessel : "U" flashing - Over current indication : "1" flashing - Over voltage indication : "2" (Above 265V) flashing - Low voltage : "3" (Below 180V) flashing - Over heated product indication : "4" (IGBT heat sink temperature above 85°C) flashing - Top surface overheated (empty vessel) : "6" (Top surface temperature above 260°C) flashing - Unstable power indication: "7" flashing - Defective PCB indication : "8" flashing - Defective Working Coil indication : "9" flashing								
	<input checked="" type="checkbox"/> Under Range - Recognize cookware up to 4cm from top glass - Cognition Area is more wide than other products - Install the product under the table without perforated								
	Warranty	1 year (to be charged in case of user's negligence)							

#503, Hanam Venture Center, Geomdansen-ro 239, Hanam-si, Gyeonggi-do, 13023 / Tel : +82-31-793-5895 / FAX : +82-31-793-5862

DIPO INDUCTION RANGE / www.dipoinduction.com

COPYRIGHT©2010 DIPO INDUCTION CO., LTD ALL RIGHTS RESERVED.

Installation Guide and Dimension (mm)	
<p>Step 1 (wooden table)</p>	<p>How to Install under Wooden Table</p>
	<ol style="list-style-type: none"> 1. Install the trim ring with tapping screws under wooden table and install stopper trim ring. (M4 X 10mm * 6 EA) (Thickness of wooden table should be between 20mm and 30mm) 2. Insert unit by sliding and insert stopper trim ring into main trim ring. Make sure the unit is equipped properly with M4 x 10mm screws. (If table thickness is 10mm, screws should be less than 10mm) <p>※ We recommend inserting unit into trim ring first and installing trim ring with unit after.</p>
<p>Step 2 (wooden table)</p>	
	
<p>Step 3 (wooden table)</p>	<p>Installation Drawing (marble)</p>
	
<p>Controller</p>	<p>Controller Installation</p>
 <p>Control Wire Length = 660mm</p>	 <p>4-Screw Hole</p>
<p>#503, Hanam Venture Center, Geomdansen-ro 239, Hanam-si, Gyeonggi-do, 13023 / Tel : +82-31-793-5895 / FAX : +82-31-793-5862</p> <p>DIPO INDUCTION RANGE / www.dipoinduction.com</p> <p>COPYRIGHT©2010 DIPO INDUCTION CO., LTD ALL RIGHTS RESERVED.</p>	