

Drop-in Warmer (with Plastic Casing)

BKPW



Specification

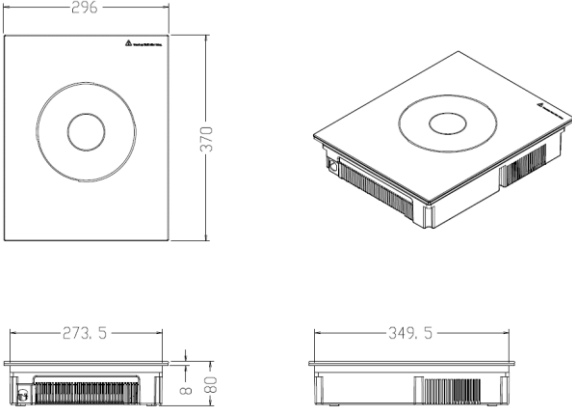
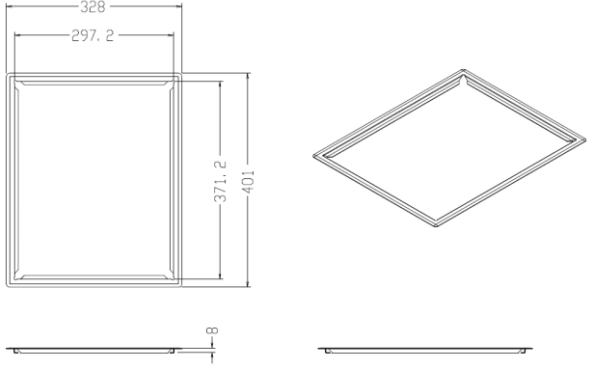


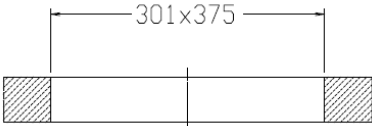
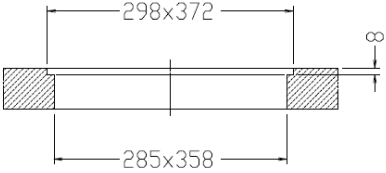
Electricity	BKPW	220V, 60Hz, 1PH	Power Consumption	BKPW	400 W				
	BKPW11-A	110V, 50/60Hz, 1PH		BKPW-A					
	BKPW-E	220~240V, 50/60Hz, 1PH		BKPW-E					
	BKPW-H	220~240V, 50/60Hz, 1PH		BKPW-H					
	BKPW-J	200V, 50/60Hz, 1PH		BKPW-J					
Power Connection		Plug type	Max Current		2 A				
Conversion to Calory		345.6 Kcal/h							
7 Warming Steps (1-7)		1	2	3	4	5	6	7	(1L Water, using chafer)
		35℃	40℃	50℃	60℃	70℃	80℃	90℃	
Dimension / Weight		Product: 296 X 370 X 80 (mm) / 4kg Package: 490 X 360 X 170 (mm) / 4.8kg							
Controller		Touch screen (integrated into top glass)							
Cookware Diameter		min : Ø130mm max : Ø240mm		Loadable Weight		30 Kg			
Recommendation		Buffet, Warmer							
Functions & Features		<input checked="" type="checkbox"/> Safety - No vessel : "U" flashing - Over current indication : "1" flashing - Over voltage indication : "2" (Above 265V) flashing - Low voltage : "3" (Below 180V) flashing - Over heated product indication : "4" (IGBT heat sink temperature above 85℃) flashing - Top surface overheated (empty vessel) : "6" (Top surface temperature above 260℃) flashing - Unstable power indication: "7" flashing - Defective PCB indication : "8" flashing - Defective Working Coil indication : "9" flashing							
Warranty		1 year (to be charged in case of user's negligence)							

Seoul Office: #75, Ahasan-ro 78-gil, Gwangjin-gu, Seoul, Republic of Korea 04969 / Tel : +82 2-444-5895 / Fax : +82 70-4694-5412

R&D Center: #209, Goraesan-ro, Wabu-eup, Namyangju-si, Gyeonggi-do, Republic of Korea 12202 / Tel : +82 2-444-5895 / Fax : +82 70-4694-5412

DIPO INDUCTION CO., Ltd. / www.dipoele.com

COPYRIGHT©2010 DIPO INDUCTION CO., LTD ALL RIGHTS RESERVED.

Dimension (mm)	
Product	Installation Guide
	
Case Cut (using installation guide)	Case Cut (not using installation guide)
	
Table Cut (using installation guide)	Table Cut (for "L" type hole)
	
Seoul Office: #75, Ahasan-ro 78-gil, Gwangjin-gu, Seoul, Republic of Korea 04969 / Tel : +82 2-444-5895 / Fax : +82 70-4694-5412 R&D Center: #209, Goraesan-ro, Wabu-eup, Namyangju-si, Gyeonggi-do, Republic of Korea 12202 / Tel : +82 2-444-5895 / Fax : +82 70-4694-5412 DIPO INDUCTION CO., Ltd. / www.dipoele.com	
COPYRIGHT©2010 DIPO INDUCTION CO., LTD ALL RIGHTS RESERVED.	